


# 8

## Butterfly Valves



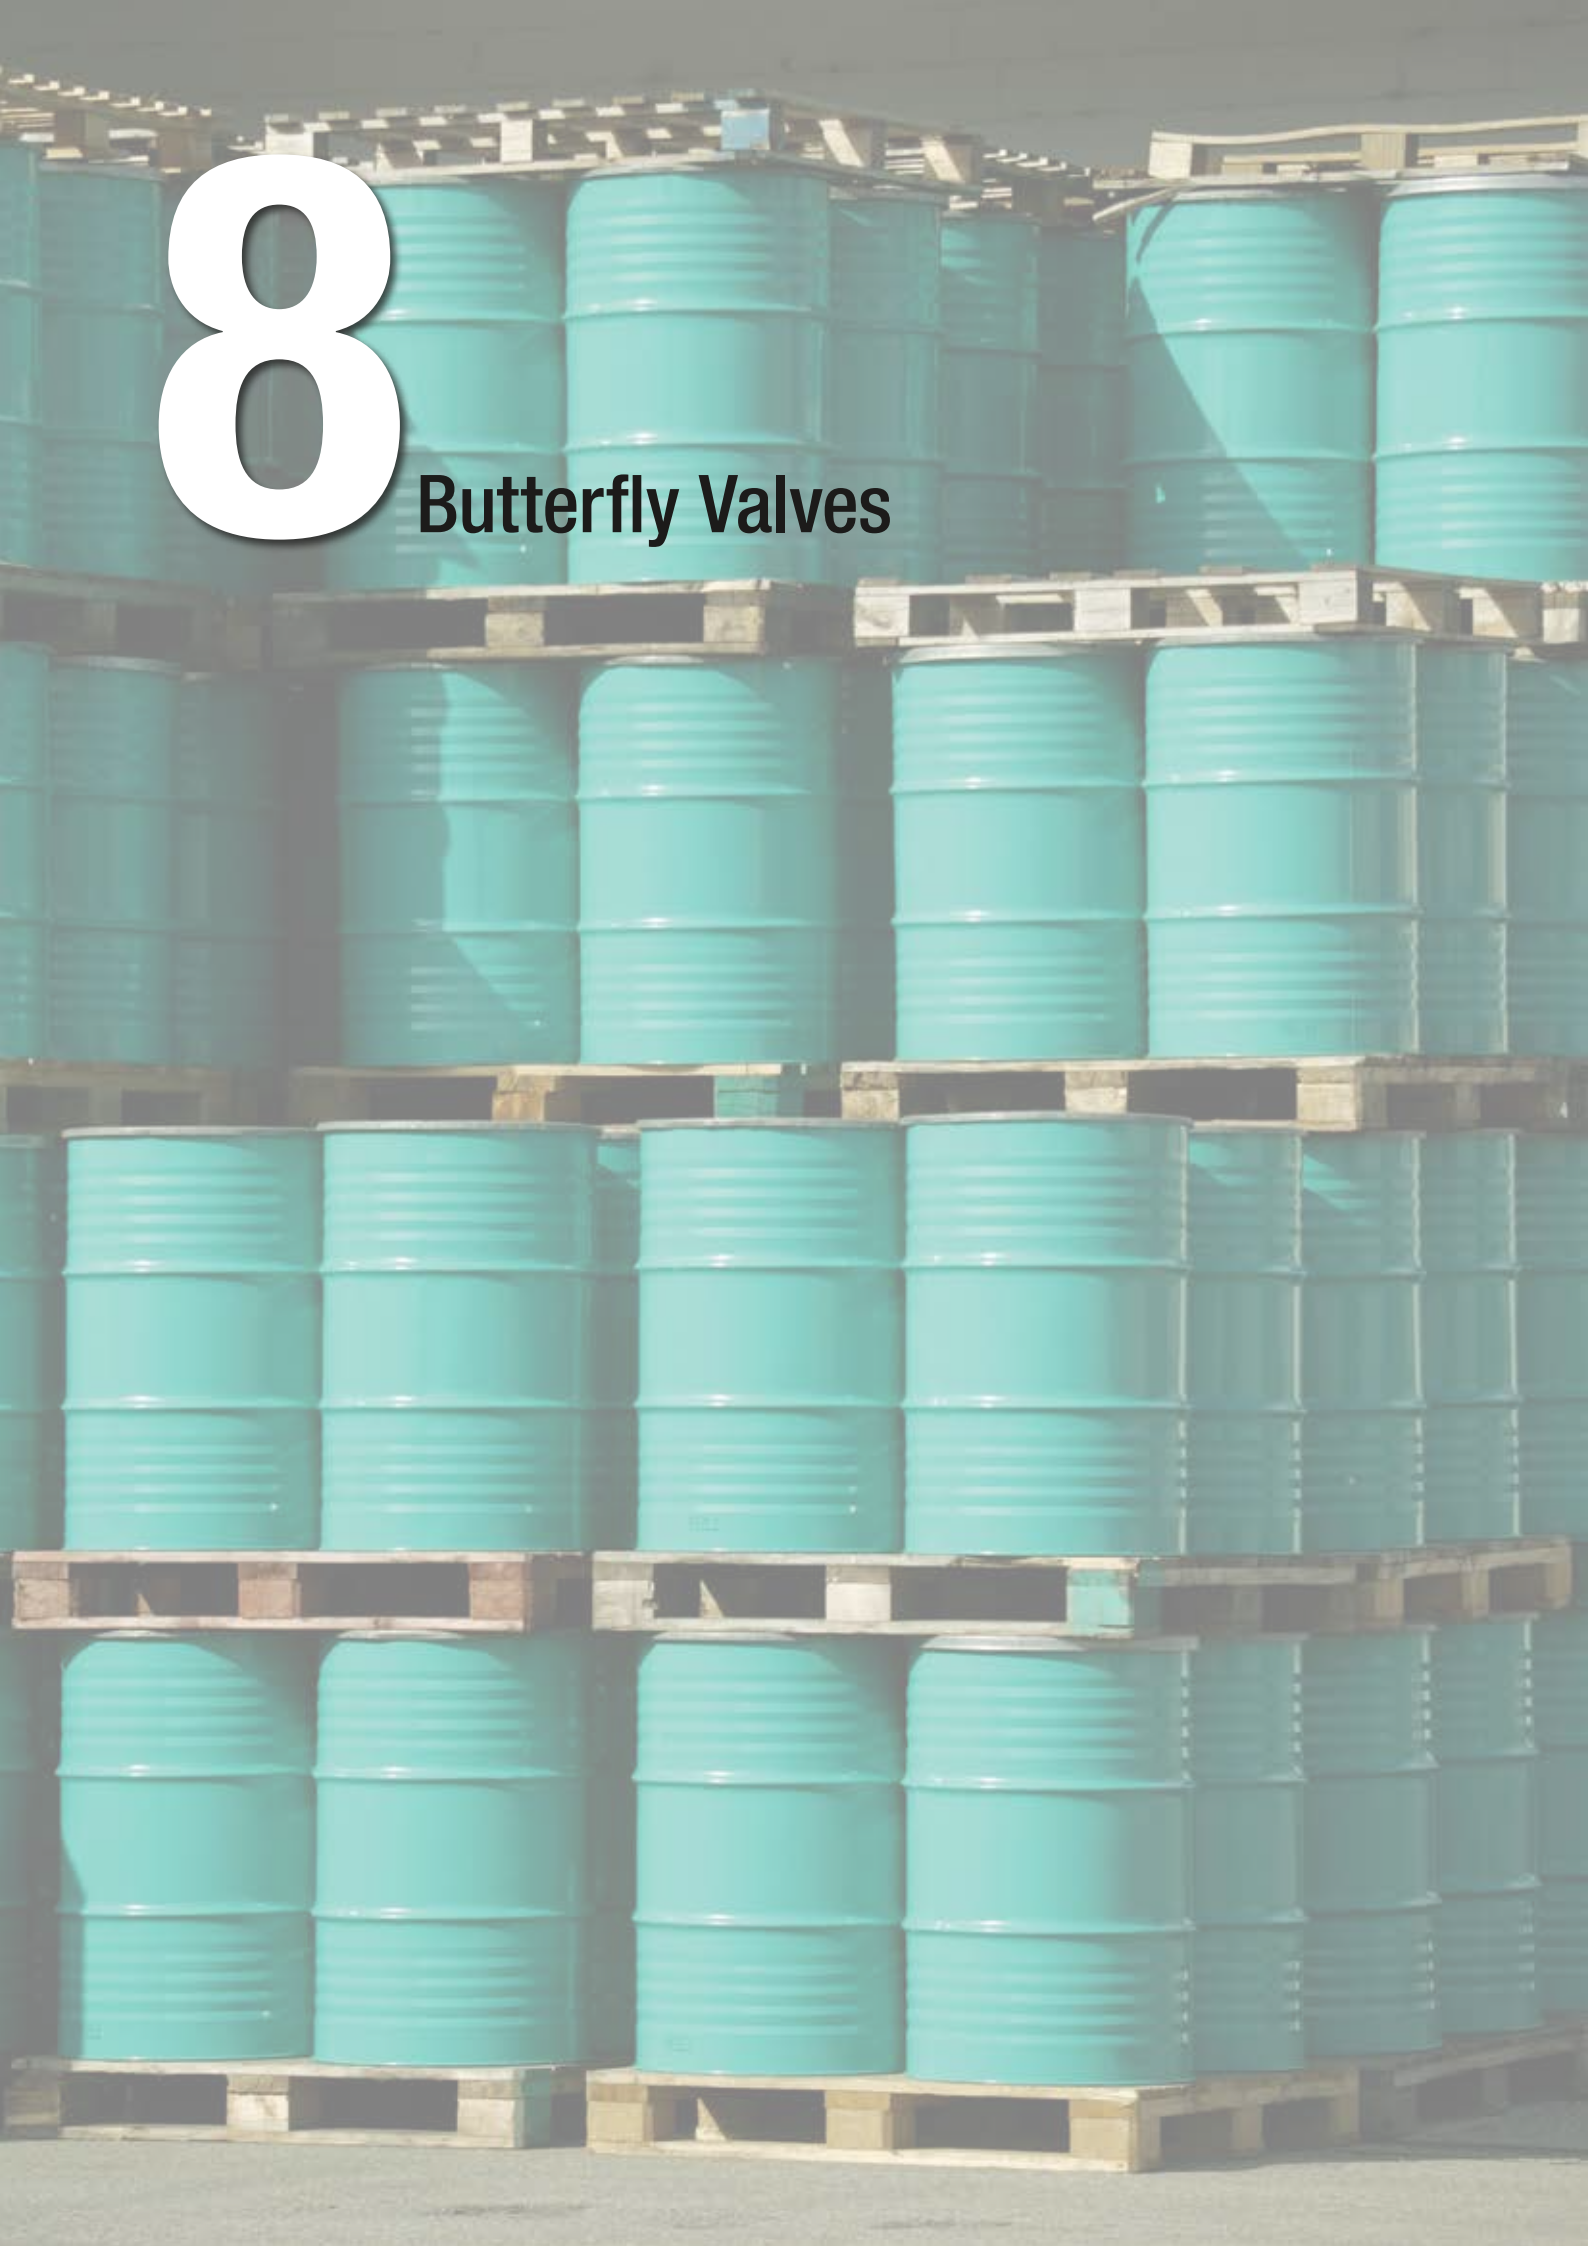

## BUTTERFLY VALVES WAFER TYPE, SERIE T20W

Part. no	Pressure	Connection	Description
<i>Body: GGG50, Disc: 316, Seat: NBR</i>			
T20W94N-040	16 BAR	DN40	DN PN16/ANSI150
T20W94N-050	16 BAR	DN50	DN PN16/ANSI150
T20W94N-065	16 BAR	DN65	DN PN16/ANSI150
T20W94N-080	16 BAR	DN80	DN PN16/ANSI150
T20W94N-100	16 BAR	DN100	DN PN16/ANSI150
T20W34N-125	16 BAR	DN125	DN PN16/ANSI150
T20W34N-150	16 BAR	DN150	DN PN16/ANSI150
T20W34N-200	16 BAR	DN200	DN PN16/ANSI150
T20W34N-250-GB	16 BAR	DN250	DN PN16/ANSI150
T20W34N-300-GB	16 BAR	DN300	DN PN16/ANSI150

<i>Body: GGG50, Disc: AluBronze, Seat: NBR</i>			
T20W38N-040	16 BAR	DN40	DN PN16/ANSI150
T20W38N-050	16 BAR	DN50	DN PN16/ANSI150
T20W38N-065	16 BAR	DN65	DN PN16/ANSI150
T20W38N-080	16 BAR	DN80	DN PN16/ANSI150
T20W38N-100	16 BAR	DN100	DN PN16/ANSI150
T20W38N-125	16 BAR	DN125	DN PN16/ANSI150
T20W38N-150	16 BAR	DN150	DN PN16/ANSI150
T20W38N-200	16 BAR	DN200	DN PN16/ANSI150
T20W38N-250-GB	16 BAR	DN250	DN PN16/ANSI150
T20W38N-300-GB	16 BAR	DN300	DN PN16/ANSI150

*EPDM seat, bytt ut N med E. VITON seat, bytt ut N med V. Body: WCB Carbon steel, bruk T50 Body: 316 steel, bruk T40 Gear Box, sett inn GB etter part nummeret. Actuator, sett in SR for Spring return og DA for Double Acting Pneumatic Actuator.*



## BUTTERFLY VALVES - DNV TYPE APPROVAL CERTIFICATE

LUG TYPE, SERIE VBFL, DN PN10/16

Part. no	Pressure	Connection	Description
<i>Body: GGG40, Disc: 316, Seat: NBR</i>			
VBFL-3261N-040	16 BAR	DN40	Lever handle
VBFL-3261N-050	16 BAR	DN50	Lever handle
VBFL-3261N-065	16 BAR	DN65	Lever handle
VBFL-3261N-080	16 BAR	DN80	Lever handle
VBFL-3261N-100	16 BAR	DN100	Lever handle
VBFL-3261N-125	16 BAR	DN125	Lever handle
VBFL-3261N-150	16 BAR	DN150	Lever handle
VBFL-3261N-200	16 BAR	DN200	Lever handle
<i>Body: GGG40, Disc: AluBronze, Seat EPDM</i>			
VBFL-3271E-040	16 BAR	DN40	Lever handle
VBFL-3271E-050	16 BAR	DN50	Lever handle
VBFL-3271E-065	16 BAR	DN65	Lever handle
VBFL-3271E-080	16 BAR	DN80	Lever handle
VBFL-3271E-100	16 BAR	DN100	Lever handle
VBFL-3271E-125	16 BAR	DN125	Lever handle
VBFL-3271E-150	16 BAR	DN150	Lever handle
VBFL-3271E-200	16 BAR	DN200	Lever handle

FOR ANS150#, SETT INN A ETTER L.



## BUTTERFLY VALVES

### LUG TYPE, SERIE T20W

Part. no	Pressure	Connection	Description
<i>Body: GGG50, Disc: 316, Seat: NBR</i>			
T20L94N-040	16 BAR	DN40	PN16
T20L94N-050	16 BAR	DN50	PN16
T20L94N-065	16 BAR	DN65	PN16
T20L94N-080	16 BAR	DN80	PN16
T20L94N-100	16 BAR	DN100	PN16
T20L34N-125	16 BAR	DN125	PN16
T20L34N-150	16 BAR	DN150	PN16
T20L34N-200	16 BAR	DN200	PN16
T20L34N-250-GB	16 BAR	DN250	PN16
T20L34N-300-GB	16 BAR	DN300	PN16

*For PN10, sett inn P etter L.  
For ANSI 150#, sett inn A etter L.*

<i>Body: GGG50, Disc: AluBronze, Seat: NBR</i>			
T20L38N-040	16 BAR	DN40	PN16
T20L38N-050	16 BAR	DN50	PN16
T20L38N-065	16 BAR	DN65	PN16
T20L38N-080	16 BAR	DN80	PN16
T20L38N-100	16 BAR	DN100	PN16
T20L38N-125	16 BAR	DN125	PN16
T20L38N-150	16 BAR	DN150	PN16
T20L38N-200	16 BAR	DN200	PN16
T20L38N-250-GB	16 BAR	DN250	PN16
T20L38N-300-GB	16 BAR	DN300	PN16

*EPDM seat, bytt ut N med E. VITON seat, bytt ut N med V.  
Body: WCB Carbon steel, bruk T50  
Body: 316 steel, bruk T40  
Gear Box, sett inn GB etter part nummeret.  
Actuator, sett in SR for Spring return og DA for Double Acting Pneumatic Actuator.*

### OPTION:

Connection	Wafer & Lugged
Materials	Carbon Steel, 316, Monel, Alu Bronze, Titan, Duplex, Super Duplex, 6MO, Hastelloy, Alloy 20 etc.
Temperature	Minus 50 to pluss 600 Deg C
General Design and Manufacturing	API 609 Kategori B
Pressure temperature rating	ANSI B16.34
Valve face to face dimension	API 609 Kategori B / ANSI B 6.10
Valve Inspection and Testing	API 598 / ANSI / FCI 70-2
Flange standard conformity	ANSI 150/300 and PN16/25/40
Firesafe Testing	API 607

